




**KEY**

	Existing woodland to be retained
	Existing riparian buffer to be retained
	Replacement tree planting - Mixed native woodland
	Replacement tree planting - wetter areas and floodplain
	S1 - Proposed woodland understorey scrub and shrub mix
	H1 - Proposed mixed native hedgerow - screening
	No-Dig Surface Installation Areas

**Trees replanted at a ratio of 3:1 - Total number of trees replanted minimum 186 trees**

**NOTES:**

Refer to drawing number:  
**415-LST-XX-XX-DR-L-0303 for location of trees, shrubs and hedge schedule**

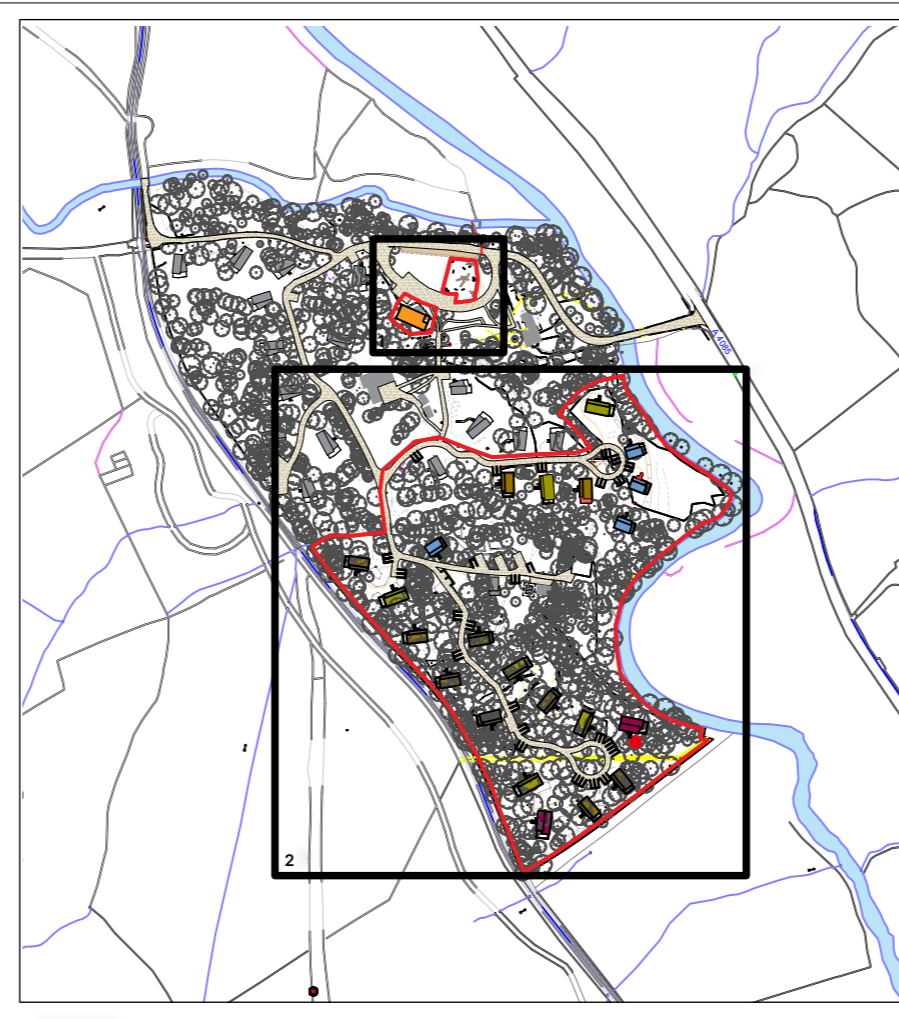

**NOTES:**

1. Do not scale from this drawing.
2. Always work to noted dimensions.
3. All dimensions are in millimetres unless otherwise stated.
4. All setting out, levels and dimensions to be agreed on site.
5. The dimensions of all materials must be checked on site before being laid out.
6. This drawing must be read with the relevant specification clauses and detail drawings.
7. Order of construction and setting out to be agreed on site.

Revision	Date	Description	Drawn/Approv.
P03	15/10/202	Updates to recycling points	BH CF
P02	09/10/24	Updates with no dig areas	BH CF
P01	23/08/24	First Draft	BH CF

Client	Forest Holidays	
Project	Forest Holidays Beddgelert	
Drg Title	Planting Plan - Woodland trees and Shrubs	
Created on	Created by	Approved by
15/10/24	BH	CF
Scale	Size	Workstage
1:500	A1	S3
Drg No.	Suitability	Revision
415-LST-XX-XX-DR-L-0302	S3	P03

THIS DRAWING IS COPYRIGHT PROTECTED AND MAY NOT BE REPRODUCED IN WHOLE OR PART WITHOUT WRITTEN AUTHORITY FROM THE OWNER.

